

PCB Plain Copper Busbar



FEATURES

Heavy-duty power connection

Circuit breaker, generator and prefabricated power network conductor

Alternative to large and multiple cables

Earth/ground connection

Power distribution

Rounded edges

Material: Copper



SPECIFICATIONS

Table 1/2


Catalog Number	Article Number	Width (W)	Thickness (T)	Length (L)	Unit Weight
PCB-1M-12X4	550780	0.47"	0.16"	38.98"	0.95 lb
PCB-2M-100X10	549750	3.94"	0.39"	78.74"	39.24 lb
PCB-2M-100X5	549640	3.94"	0.2"	78.74"	19.62 lb
PCB-2M-120X10	549760	4.72"	0.39"	78.74"	47.18 lb
PCB-2M-12X4	550790	0.47"	0.16"	78.15"	1.87 lb
PCB-2M-12X5	550770	0.47"	0.2"	78.15"	2.34 lb
PCB-2M-25X5	549600	0.98"	0.2"	78.74"	4.85 lb
PCB-2M-30X10	549700	1.18"	0.39"	78.74"	12.13 lb
PCB-2M-40X10	549710	1.57"	0.39"	78.74"	15.65 lb
PCB-2M-50X10	549720	1.97"	0.39"	78.74"	19.62 lb
PCB-2M-50X5	549610	1.97"	0.2"	78.74"	9.92 lb
PCB-2M-60X10	549730	2.36"	0.39"	78.74"	23.59 lb
PCB-2M-63X5	549620	2.48"	0.2"	78.74"	12.35 lb

Catalog Number	Article Number	Width (W)	Thickness (T)	Length (L)	Unit Weight
PCB-2M-80X10	549740	3.15"	0.39"	78.74"	31.31 lb
PCB-2M-80X5	549630	3.15"	0.2"	78.74"	15.65 lb
PCB-4M-100X10	550930	3.94"	0.39"	157.48"	78.48 lb
PCB-4M-100X5	550670	3.94"	0.2"	157.48"	39.24 lb
PCB-4M-120X10	550940	4.72"	0.39"	157.48"	94.36 lb
PCB-4M-160X10	550950	6.3"	0.39"	157.48"	125.66 lb
PCB-4M-20X5	550600	0.79"	0.2"	157.48"	7.85 lb

Table 2/2

Catalog Number	Article Number	Width (W)	Thickness (T)	Length (L)	Unit Weight
PCB-4M-25X5	550610	0.98"	0.2"	157.48"	9.81 lb
PCB-4M-30X10	550970	1.18"	0.39"	157.48"	23.57 lb
PCB-4M-30X5	550620	1.18"	0.2"	157.48"	11.77 lb
PCB-4M-40X10	550980	1.57"	0.39"	157.48"	31.42 lb
PCB-4M-40X5	550630	1.57"	0.2"	157.48"	15.7 lb
PCB-4M-50X10	550900	1.97"	0.39"	157.48"	39.24 lb
PCB-4M-50X5	550640	1.97"	0.2"	157.48"	19.62 lb
PCB-4M-60X10	550910	2.36"	0.39"	157.48"	47.07 lb
PCB-4M-60X5	550650	2.36"	0.2"	157.48"	23.55 lb
PCB-4M-80X10	550920	3.15"	0.39"	157.48"	62.83 lb
PCB-4M-80X5	550660	3.15"	0.2"	157.48"	31.39 lb

DIAGRAMS

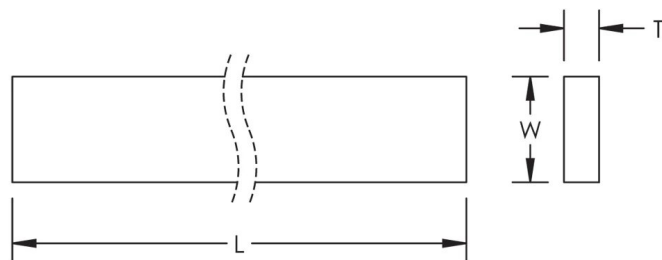

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical
Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500

