

# Wire Basket Tray Independent Underfloor Support



The nVent CADDY Wire Basket Tray Underfloor Support provides a reliable method for routing wire basket trays beneath the floor with independent structural support. This component is ideal for installations requiring low-voltage cabling to pass under cabinets or equipment.

Engineered for stability and simplicity, the underfloor support system eliminates the need for complex framing. It braces the tray directly beneath raised floors, allowing for clean, unobtrusive cable pathways that preserve floor space and reduce visual clutter. This is especially valuable in data centers, control rooms, and other high-density environments where cable organization and accessibility are critical.

The Support integrates seamlessly with the broader nVent CADDY Wire Basket Tray System, ensuring compatibility with shaped and round wire tray profiles. Its design accommodates standard fasteners and finishes, including pre-galvanized, zinc electroplate, and powder coat options, making it adaptable to a wide range of project specifications.

## CARATTERISTICHE

Designed to be used with the nVent CADDY Wire Basket Tray Washer Support and nVent CADDY Wire Basket Tray Ground Splice

Maintains a fixed and secure distance from the ground to ensure safety and accessibility

Available in a range of sizes to match wire basket tray design

Fixed height ensures a level installation


**Materiale:** Acciaio  
**Finitura:** Prezincato

## SPECIFICHE

| Codice a catalogo | Altezza (H) | Lunghezza (L) | Lunghezza 1 (L1) | Larghezza (W) | Dimensione del foro (HS) | Peso unitario |
|-------------------|-------------|---------------|------------------|---------------|--------------------------|---------------|
| WBTUS04           | 32 mm       | 767mm         | 560.78 mm        | 235 mm        | 14.3 mm                  | 0.862 kg      |
| WBTUS06           | 32 mm       | 868mm         | 560.78 mm        | 235 mm        | 14.3 mm                  | 0.953 kg      |
| WBTUS08           | 32 mm       | 965mm         | 560.78 mm        | 235 mm        | 14.3 mm                  | 1.089 kg      |
| WBTUS12           | 32 mm       | 1174mm        | 560.78 mm        | 235 mm        | 14.3 mm                  | 1.588 kg      |

| Codice a catalogo | Altezza(H) | Lunghezza(L) | Lunghezza 1(L1) | Larghezza(W) | Dimensione del foro (HS) | Pesounitario |
|-------------------|------------|--------------|-----------------|--------------|--------------------------|--------------|
| WBTUS18           | 32 mm      | 1474mm       | 560.78 mm       | 235 mm       | 14.3 mm                  | 2.404 kg     |
| WBTUS24           | 32 mm      | 1778mm       | 560.78 mm       | 235 mm       | 14.3 mm                  | 3.22 kg      |

## SCHEMI

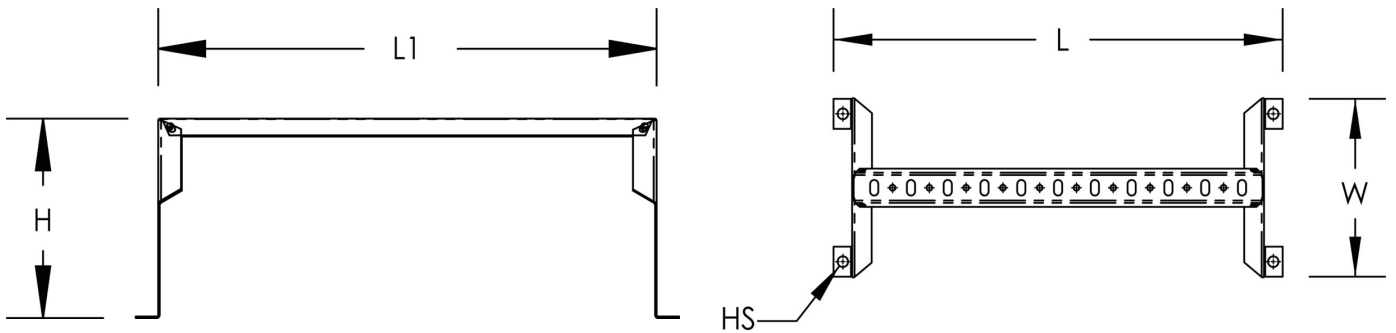

## AVVERTIMENTO

I prodotti nVent devono essere installati e utilizzati solo come indicato nelle schede istruzioni e nei materiali di formazione di nVent. Le schede istruzioni sono disponibili su [www.nvent.com](http://www.nvent.com) e presso il vostro rappresentante del servizio clienti nVent. Un'installazione scorretta, un uso improprio, un'applicazione errata o qualsiasi altro mancato rispetto completo delle istruzioni e degli avvertimenti di nVent può causare malfunzionamenti del prodotto, danni alla proprietà, gravi lesioni personali e morte e/o annullare la vostra garanzia.

### Nord America

+1.800.753.9221  
Opzione 1 – Assistenza  
clienti  
Opzione 2 – Assistenza  
tecnica

### Europa

Paesi Bassi:  
+31 800-0200135  
Francia:  
+33 800 901 793

### Europa

Germania:  
800 1890272  
altri paesi:  
+31 13 5835404

### APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500

