

Digital Lightning Event Counter



VLASTNOSTI

Records quantity, hour and date of lightning strikes for retrieval during inspections

Includes mounting brackets for use with nVent ERICO Ericore, ISO nV, bare stranded conductors or tape

Includes replaceable CR17335 lithium 3V battery

Up to five year battery life


SPECIFIKACE

Table 1/2

Katalogové číslo	Materiál	Enclosure Rating	Trip Threshold	Hloubka (D)	Height (H)	Width (W)
LECV	Polycarbonate	IP 65, NEMA®-4	1 - 100 kA 8/20 μ s	42mm	141 mm	91 mm

Table 2/2

Katalogové číslo	Temperature	Unit Weight	Complies With
LECV	-40 to 80 °C	0.36 kg	EN IEC 62561-6

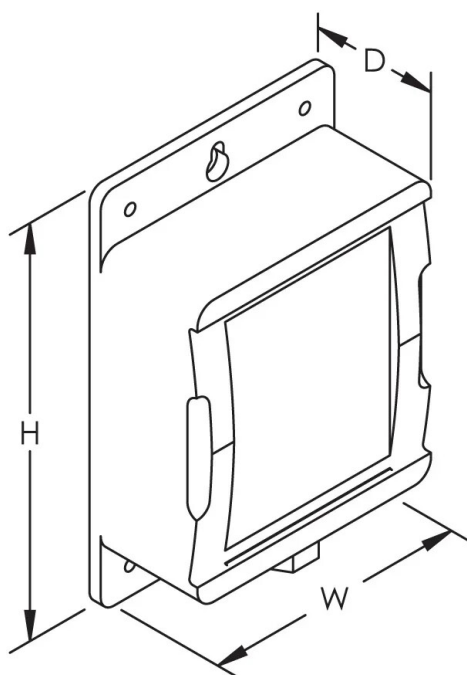

UPOZORNĚNÍ

Produkty nVent musí být instalovány a používány pouze tak, jak je uvedeno v instrukčních listech a materiálech pro školení nVent. Instrukční listy jsou k dispozici na www.nvent.com a od vašeho zástupce zákaznického servisu nVent. Nesprávná instalace, zneužití, nesprávné použití nebo jiný nedostatek úplného dodržování pokynů a varování nVent může způsobit selhání produktu, poškození majetku, vážné zranění osob a smrt a/nebo zrušit vaši záruku.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical

Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

This document is system-generated.