

nVent CADDY All-in-One Between-Stud With Removable Mud Ring, Multi-Box



FEATURES

Comes with multiple boxes pre-assembled for side by side power and data applications

Removable mud ring provides front access to the interior of the box

Pre-bent tabs on support bracket help to quickly square assembly to stud

Center marks provide easy height positioning

Includes multiple knockouts on each side of the box

Material: Steel
Finish: Pregalvanized
Knockout Sizes, Box 1: (8) 12.7 mm, 19 mm;(3) 12.7 mm



SPECIFICATIONS

Table 1/2

Catalog Number	Knockout Sizes, Box 2	Gang, Box 1	Ground Wire Included, Box 1	Volume, Box 1	Gang, Box 2	Ground Wire Included, Box 2
A1BF1G41N	(4) 25.4 mm, (4) 31.8 mm	1	Yes	537cm ³	1	No
A1BF1GD1N	(5) 12.7 mm, 19 mm, (1) 12.7 mm, (3) 25.4 mm	1	Yes	537cm ³	1	No



Table 2/2

Catalog Number	Volume, Box 2	Drywall Thickness	Stud Spacing	Depth (D)	A	B
A1BF1G41N	688cm ³	15.9 mm	406.4 - 609.6 mm	92.1mm	146.1 mm	104.9 mm
A1BF1GD1N	537cm ³	15.9 mm	406.0 - 609.6 mm	92.1mm	136.53 mm	104.78 mm

Ground wire pigtail is 10".

24" stud spacing requires use of three mounting screws.

Use only with nVent CADDY All-in-One box assemblies.

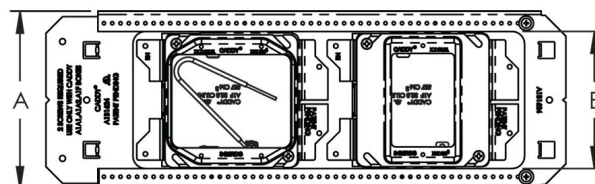

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical
Support

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Germany:
800 1890272
Other Countries:
+31 13 5835404

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

This document is system-generated.

