


Universal Electrical Box Bracket

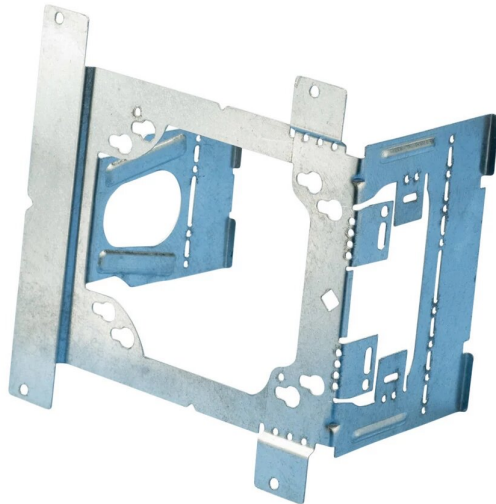

FEATURES

- Can be pre-fabricated prior to attaching box to the bracket
- Box locking tabs securely lock electrical boxes in place to prevent disassembly during shipment
- Mounts electrical boxes
- Mounts plaster rings for low voltage applications
- Easily identify mounting orientation of electrical boxes
- Feet on the far-side supports help prevent damage to the drywall
- Can be mounted to stud on all four sides
- Designed with two far-side supports for added stability
- Allows any box size to be used

Material: Steel
Finish: Pregalvanized



BABA



SPECIFICATIONS

Catalog Number	Stud Wall Depth	Box Depth	Box Size
TEB23 	2 1/2" - 3", 5/8" - 3.62"	1 1/2", 2 1/8", 2 1/2"	4", 4 11/16"
TEB4 	4"	1 1/2", 2 1/8", 2 1/2"	4", 4 11/16"

ADDITIONAL PRODUCT DETAILS

Octagonal keyholes for 4" boxes, round keyholes for 4-11/16" boxes.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical

Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

This document is system-generated.

[nVent.com/ENDD1](https://www.nvent.com/ENDD1)

