

# nVent CADDY Cat HP J-Hook, PG, Painted, Orange, 75 mm dia

## NÚMERO DE CATÁLOGO

### CAT48HPOR



nVent CADDY Cat HP J-Hooks are the foundation of the nVent CADDY Cat HP System. The revamped nVent CADDY Cat HP J-Hook offers contractors three unique, UL-certified attachment methods out of the box—wall, ceiling, and threaded rod installations. This added functionality enables contractors to reduce SKU inventory while maintaining efficiency and continued progress on the jobsite with the most common structural attachment methods.

The modernized design of the nVent CADDY Cat HP J-Hook is engineered to provide optimal support and protection for today's rapidly evolving, high-performing low voltage cable. Contractors can feel confident utilizing the nVent CADDY Cat HP J-Hook due to its installation versatility, superior cable support and protection, and technical certifications.

## CARACTERÍSTICAS

One through-hole for easier installation of threaded rod

Versa-Mount Technology: Innovative attachment design provides multiple structural and installation methods for wall, ceiling, and threaded rod mounting applications

Improved design allows for optimized inventory, reducing job site scheduling risks associated with multiple SKUs

Provides optimal support for high-performance data cable—including category cable, Power over Ethernet (PoE), and fiber optic

Complies with EN 50174-2

Meets ISO®/IEC 14763-2, ANSI®/TIA 568 and ANSI®/TIA 569



## CARATERÍSTICAS DO PRODUTO

Número do artigo: 181127

Material: Aço

Acabamento: Pregalvanized, Painted;Painted

Cor: Orange

Diâmetro (Ø): 75 mm

Area: 5974mm<sup>2</sup>

Cable Capacity, Cat 5e: 200

Cable Capacity, Cat 6: 150

Cable Capacity, Cat 6A: 80

Altura (H): 164.6 mm

Static Load: 267N

## DETALHES ADICIONAIS DO PRODUTO

---

Non-continuous supports may not exceed spacing of 5' (1.5 m) per TIA 569-C.9.7 and EN 50174-2.




Cable capacity is calculated based on a 70% fill rate.

| Fire Rated Power Cable Capacity (Distance between J-hooks must not exceed 500 mm center to center) |                                   |                  |                |                  |                |                  |             |                |             |
|----------------------------------------------------------------------------------------------------|-----------------------------------|------------------|----------------|------------------|----------------|------------------|-------------|----------------|-------------|
| Part Number                                                                                        |                                   | CAT16HP          |                | CAT32HP CAT48HP  |                | CAT64HP          |             | CAT64HP        |             |
| Configuration                                                                                      |                                   | Single Layer     |                | Single Layer     |                | Single Layer     |             | Double Layer   |             |
| Max Load per Support [kg/m]                                                                        |                                   | 0.8 kg/m         |                | 1.4 kg/m         |                | 2.6 kg/m         |             | 2 kg/m         |             |
| Cable                                                                                              | Linear Weight of the Cable [kg/m] | Number of Cables | Classification | Number of Cables | Classification | Number of Cables |             | Classification |             |
| 4x1,5<br>(N)HXH<br>FE180 E30-E60                                                                   | 0.234                             | 3                | E30            | 5                | E30 E60        | 11               | E30 E60     | 8              | E30 E60     |
| 5x1,5<br>(N)HXH FE<br>180 E30-E60                                                                  | 0.277                             | 2                |                | 5                | E30            | 9                | E30         | 7              | E30         |
| 7x1,5<br>(N)HXH FE<br>180 E30-E60                                                                  | 0.330                             | 2                |                | 4                |                | 7                |             | 6              |             |
| 12x1,5<br>(N)HXH FE<br>180 E30-E60                                                                 | 0.513                             | 1                |                | 2                |                | 5                |             | 3              |             |
| 19x1,5<br>(N)HXH FE<br>180 E30-E60                                                                 | 0.715                             | 1                |                | 1                |                | 3                |             | 2              |             |
| 24x1,5<br>(N)HXH FE<br>180 E30-E60                                                                 | 0.901                             | -                |                | 1                |                | 2                |             | 2              |             |
| 30x1,5<br>(N)HXH FE<br>180 E30-E60                                                                 | 1.052                             | -                |                | 1                |                | 2                |             | 1              |             |
| 2x2,5<br>(N)HXH FE<br>180 E30-E60                                                                  | 0.178                             | 4                | E30            | -                | -              | -                | -           | -              | -           |
| 3x2,5<br>(N)HXH FE<br>180 E30-E60                                                                  | 0.250                             | 3                |                | -                | -              | -                | -           | -              | -           |
| 4x2,5<br>(N)HXH FE<br>180 E30-E60                                                                  | 0.296                             | 2                |                | -                | -              | -                | -           | -              | -           |
| 5x2,5<br>(N)HXH FE<br>180 E30-E60                                                                  | 0.352                             | 2                |                | -                | -              | -                | -           | -              | -           |
| 4x1,5<br>(N)HXH FE<br>180 E90                                                                      | 0.234                             | 3                | E30 E60 E90    | 5                | E30 E60 E90    | 11               | E30 E60 E90 | 8              | E30 E60 E90 |
| 5x1,5<br>(N)HXH FE<br>180 E90                                                                      | 0.277                             | 2                |                | 5                |                | 9                |             | 7              |             |
| 7x1,5<br>(N)HXH FE<br>180 E90                                                                      | 0.330                             | 2                |                | 4                |                | 7                |             | 6              |             |

|                                                                                        |       |                                                            |     |                  |                  |              |
|----------------------------------------------------------------------------------------|-------|------------------------------------------------------------|-----|------------------|------------------|--------------|
| 12x1,5<br>(N)HXH FE<br>180 E90                                                         | 0.511 | 1                                                          | 2   | 5                | 3                |              |
| 24x1,5<br>(N)HXH FE<br>180 E90                                                         | 0.901 | -                                                          |     | 1                | 2                | 2            |
| 2x2x0,8 JE-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                        | 0.060 | 13                                                         | E30 | -                | -                | -            |
| 4x2x0,8 JE-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                        | 0.102 | 7                                                          |     | -                | -                | -            |
| 8x2x0,8 JE-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                        | 0.221 | 3                                                          |     | -                | -                | -            |
| 12x2x0,8 J<br>E-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                   | 0.281 | 2                                                          |     | -                | -                | -            |
| 16x2x0,8 J<br>E-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                   | 0.326 | 2                                                          |     | -                | -                | -            |
| 20x2x0,8 J<br>E-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                   | 0.421 | 1                                                          |     | -                | -                | -            |
| 32x2x0,8 J<br>E-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                   | 0.588 | 1                                                          |     | -                | -                | -            |
| 40x2x0,8 J<br>E-<br>H(St)H...Bd<br>FE180 E30-<br>E90                                   | 0.761 | 1                                                          |     | -                | -                | -            |
| Fire rating applicable when<br>linking specified J-hook to<br>the following components |       | Fire rating applicable to the following riveted assemblies |     |                  |                  |              |
| Part number                                                                            |       | Part number                                                |     |                  |                  |              |
| CATHPAN                                                                                |       | CAT16HPAB                                                  |     | CAT32HPAB        | CAT48HPAB        | CAT64HPAB    |
| CATHPA4                                                                                |       | CAT16HPBCB                                                 |     | CAT32HPAF<br>AB3 | CAT48HPAF<br>AB3 | CAT64HPAFAB3 |
| CATHPA6                                                                                |       | CAT16HPBC200B                                              |     | CAT32HPAF<br>AB4 | CAT48HPAF<br>AB4 | CAT64HPAFAB4 |
| CATHPTM                                                                                |       | CAT16HP24SM                                                |     | CAT32HPAF<br>AB6 | CAT48HPBC<br>B   | CAT64HPBCB   |

|             |              |               |              |               |
|-------------|--------------|---------------|--------------|---------------|
| CATHPBCB    | CAT16HP58SM  | CAT32HPBCB    | CAT48HP58SM  | CAT64HPBC200B |
| CATHPBC200B | CAT16HP912SM | CAT32HPBC200B | CAT48HP912SM | CAT64HP58SM   |
| CATHP912SM  | CAT16HP24    | CAT32HP24SM   | CAT48HP24    | CAT64HP912SM  |
| CATHP24     | CAT16HP58    | CAT32HP912SM  | CAT48HP58    | CAT64HP24     |
| CATHP58     | -            | CAT32HP24     | -            | -             |
| CATHP912    | -            | -             | -            | -             |

## DIAGRAMAS

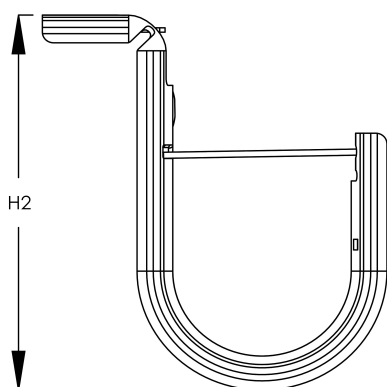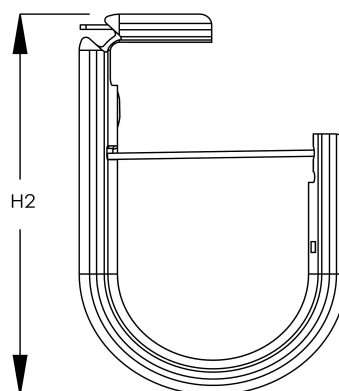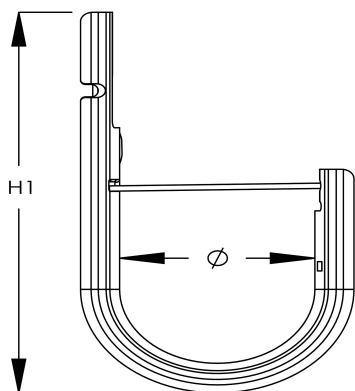

## AVISO

Os produtos nVent devem ser instalados e utilizados apenas conforme indicado nas fichas de instrução do produto e materiais de treinamento da nVent. As fichas de instrução estão disponíveis em [www.nVent.com](http://www.nVent.com) e com nossos representantes de atendimento ao cliente nVent. A instalação inadequada, uso incorreto, aplicação incorreta ou outra falha qualquer em seguir completamente as instruções e avisos da nVent podem levar ao mau funcionamento do produto, danos à propriedade, lesões corporais graves e morte, e/ou anular sua garantia.

#### **América do Norte**

+1 800 753 9221

Opção 1 – Apoio ao cliente

Opção 2 – Assistência  
técnica

#### **Europa**

Países Baixos:

+31 800-0200135

França:

+33 800 901 793

#### **Europa**

Alemanha:

800 1890272

Outros países:

+31 13 5835404

#### **APAC**

Xangai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

This document is system-generated.

