

nVent CADDY Speed Link Catenary Kit

CARACTERÍSTICAS

Kit includes pre-cut length of fuse-cut cable to avoid fraying, pre-assembled hook end fitting and tool-free locking device to save installation time

Fastens to the building structure by looping around and hooking to wire rope

Hook end-fitting easily attaches to eye nut

Spring latch helps provide secure connection



Material: Aço; Liga de zinco; Polypropylene
Acabamento: Electrogalvanized; Hot-Dip Galvanized
Wire Rope Diameter: 6 mm

ESPECIFICAÇÕES

Table 1/2

Número de catálogo	Número do artigo	Wire Rope Length	A	B	C	Altura (H)
SLK6L10	196801	10m	75 mm	40 mm	15 mm	108 mm
SLK6L15	196802	15m	75 mm	40 mm	15 mm	108 mm
SLK6L20	196803	20m	75 mm	40 mm	15 mm	108 mm
SLK6L25	196804	25m	75 mm	40 mm	15 mm	108 mm
SLK6L30	196805	30m	75 mm	40 mm	15 mm	108 mm
SLK6L40	196806	40m	75 mm	40 mm	15 mm	108 mm
SLK6L5	196800	5m	75 mm	40 mm	15 mm	108 mm
SLK6L50	196807	50m	75 mm	40 mm	15 mm	108 mm

Table 2/2

Número de catálogo	Número do artigo	Largura (W)	Espessura (T)	Ângulo (a)
SLK6L10	196801	41 mm	30 mm	60 ° Max

Número de catálogo	Número do artigo	Largura (W)	Espessura (T)	Ângulo (a)
SLK6L15	196802	41 mm	30 mm	60 ° Max
SLK6L20	196803	41 mm	30 mm	60 ° Max
SLK6L25	196804	41 mm	30 mm	60 ° Max
SLK6L30	196805	41 mm	30 mm	60 ° Max
SLK6L40	196806	41 mm	30 mm	60 ° Max
SLK6L5	196800	41 mm	30 mm	60 ° Max
SLK6L50	196807	41 mm	30 mm	60 ° Max

DETALHES ADICIONAIS DO PRODUTO


Wire Rope Length is measured from the end of the wire rope to the hook side of the swage.


Static load 1 represents a point load in the center of the catenary installation. Static load 2 represents a two or three point distributed load on the catenary installation. Static load 3 represents a four or more point distributed load on the catenary installation.

Preload of the wire rope must be applied using Catenary Tensioning Tool.

Horizontal Intallation		
Preload	1000 N	450 N
Static Load 1 (F1)	490 N	590 N
Static Load 2 (F2)	880 N	1080 N
Static Load 3 (F3)	980 N	1180 N
Vertical Installation		
Static Load 4 (F4)	4440 N	

DIAGRAMAS

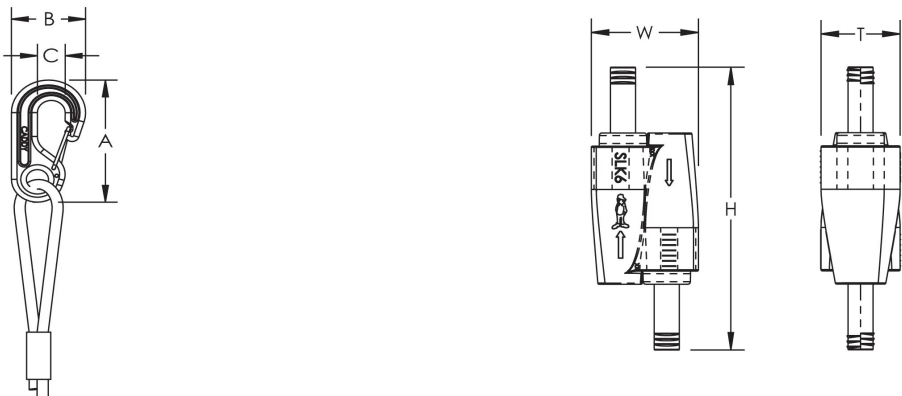

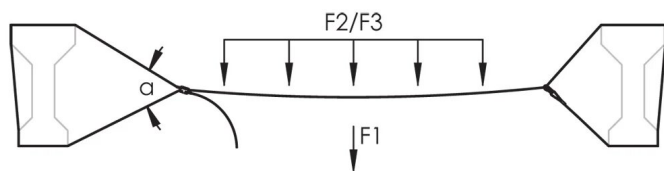

AVISO

Os produtos nVent devem ser instalados e utilizados apenas conforme indicado nas fichas de instrução do produto e materiais de treinamento da nVent. As fichas de instrução estão disponíveis em www.nVent.com e com nossos representantes de atendimento ao cliente nVent. A instalação inadequada, uso incorreto, aplicação incorreta ou outra falha qualquer em seguir completamente as instruções e avisos da nVent podem levar ao mau funcionamento do produto, danos à propriedade, lesões corporais graves e morte, e/ou anular sua garantia.

América do Norte

+1 800 753 9221
Opção 1 – Apoio ao cliente
Opção 2 – Assistência
técnica

Europa

Países Baixos:
+31 800-0200135
França:
+33 800 901 793

Europa

Alemanha:
800 1890272
Outros países:
+31 13 5835404

APAC

Xangai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500

