


LENTON Interlok Bolted Form Mount

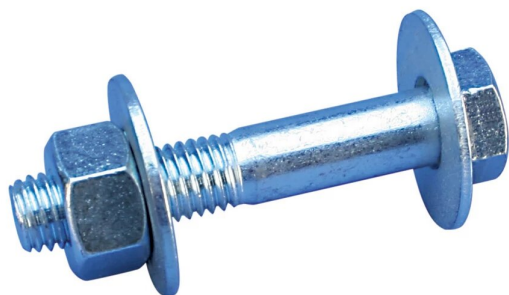

The nVent LENTON Interlok Bolted Form Mount is designed for use with nVent LENTON Interlok Grommet. These kits/bolts are used to secure nVent LENTON Interlok Grout-Fill Coupler variants in repeatable locations in the formwork. Once a Grout-Fill Coupler is placed over a Grommet, the Bolted Form Mount is tightened, which expands the Grommet, thus holding the Grout-Fill Coupler in place.

FUNKTIONER

Durable and reusable

Standard bolt uses standard sockets and wrenches


SPECIFIKATIONER

Katalognummer	Materiale	Length (L)	Thread Size (TS)	Unit Weight	Pakke mængde
LK810	Stål	89mm	5/8" UNC	0.3 kg	10

YDERLIGERE PRODUKTOPLYSNINGER

Prior to installation, please read and understand the detailed instructions and safety notices provided in the nVent LENTON Interlok Instruction Manual.

DIAGRAMS

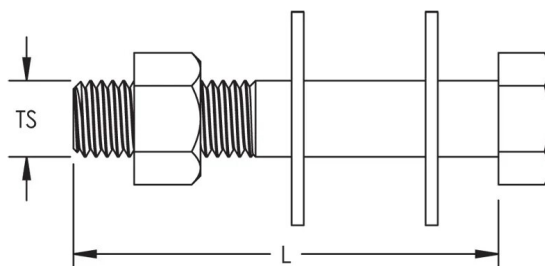

ADVARSEL

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på www.nvent.com og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden undladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical
Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Vores kraftfulde portefølje af mærker:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE